




TECHNICAL DATA ON PAGE 2	7 POLES CONNECTOR without strain relief for 0,5 - 2,5 mm cables, solid and fine - stranded, lockable screws into housing	7 POLES CONNECTOR without strain relief for 0,5 - 2,5 mm ² cables, solid and fine - stranded, lockable screws into housing Base type b	7 POLES CONNECTOR with strain relief for cross sections 1,5 - 2,5 mm ² * Covers, base and screws are not assembled see indication for assembled article on page 1. ■
---------------------------------	---	---	---


Application	Coding	Color	Order code	Descr.	Order code	Descr.	Order code	Descr.		
Mains with earth and switching application	1	⚡	EP0500	EP7M	EP0500b *	EP7Mb *	EP1500 *	EP7M + EP7G *		
	2	⚡	EP0503	EP7MN	EP0503b *	EP7Mvb *	EP1503 *	EP7MV + EP7G *		
	3	⚡	EP0504	EP7MG	EP0504b	EP7Mvb	EP1504	EP7MN + EP7G		
	4									
	5	⚡	EP0501	EP7MG	EP0501b	EP7MGb	EP1501	EP7MG + EP7G		
1 code: L1 N T1 T2 S3 B4 3 code: L1 N L1 N L2 2 code: L1 N B5 T6 T7 T8 5 code: L1 N B5 T6 T7 T8										

Male

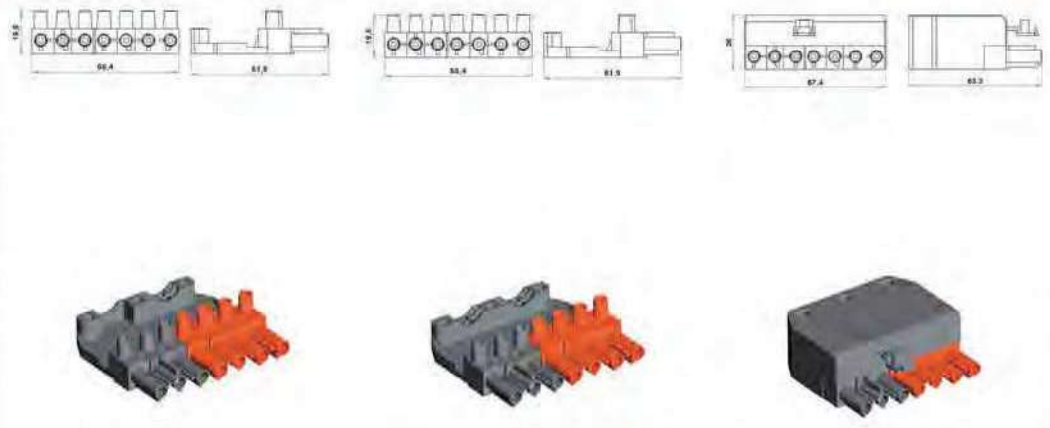

Application	Coding	Color	Order code	Descr.	Order code	Descr.	Order code	Descr.		
Mains with earth and switching application	1	⚡	EP0510	EP7F	EP0510b *	EP7Fb *	EP1510 *	EP7F + EP7g *		
	2	⚡	EP0513	EP7FV	EP0513b *	EP7Fvb *	EP1513 *	EP7FV + EP7g *		
	3	⚡	EP0514	EP7FN	EP0514b	EP7Fvb	EP1514	EP7FN + EP7g		
	4									
	5	⚡	EP0511	EP7FG	EP0511b	EP7FGb	EP1511	EP7FG + EP7g		
* for base with holes put a h near the code EXAMPLE: EP0510h ** for base type "b" with holes put a h near the code EXAMPLE: EP0510bh										
1 code: B4 S3 T2 T1 N L1 3 code: L2 N L1 N L1 2 code: T6 T7 T6 B5 N L1 5 code: T6 T7 T6 B5 N L1										

Female

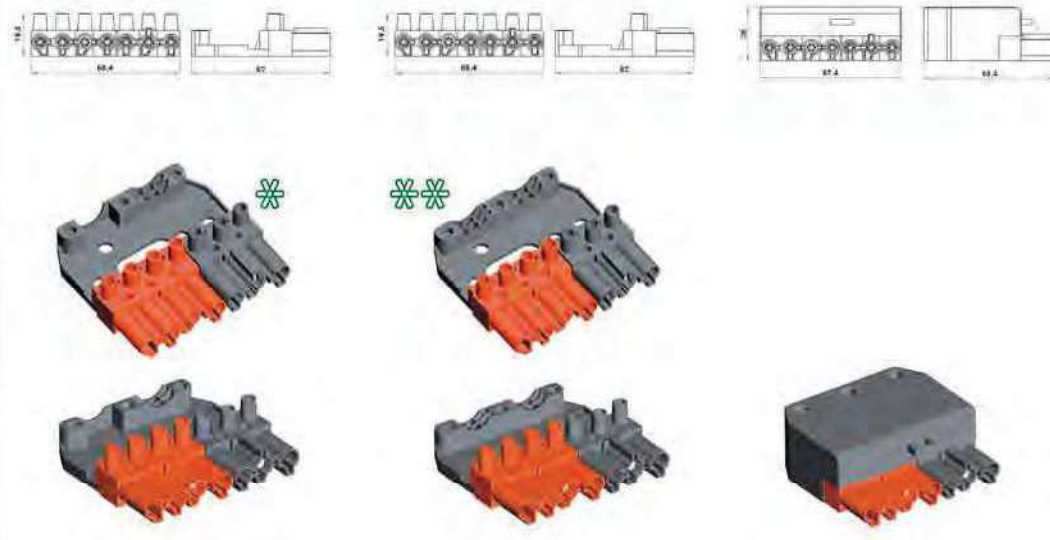

EP SYSTEM 7 POLES COVERS 250/400V, 16 A



7 POLES COVER WITH STANDARD LOCKING DEVICE ■ service see on page 1 #1	7 POLES COVER WITH STRAIGHT LOCKING DEVICE ■ service see on page 1 #2	7 POLES LOWERED COVER WITH LOCKING DEVICE ■ service see on page 1 Order code	7 POLES PRINTED ● COVER WITH STRAIGHT LOCKING DEVICE
---	---	---	---

Order code	Descr.	Order code	Descr.	Order code	Descr.	Order code	Descr.
<p>Standard height = 26mm</p>				<p>Lowered height = 20mm</p>			
EP0520	EP7G	EP0520D	EP7GD	EP0527	EP7GR	EP0528	EP7GDP
				STANDARD AND STRAIGHT LOCKING DEVICE			

Order code	Descr.	Order code	Descr.	Order code	Descr.
EP0523	EP7g	EP0525	EP7g3		
<p>* available strain reliefs with one/two/no one input cable: Ø 7 mm = WITH BASE TYPE "b" Ø 7mm - 11mm = WITH STANDARD BASE</p> <p>Put the letter near the code to chose the article</p> <p>EXAMPLE: EP15002H EP7M+EP7G2H EP0520C EP7GC</p>					
TECHNICAL DATA ON PAGE 2					